




Hydraulic Separator


The NexBalance hydraulic separator makes primary secondary piping the easiest part of your installation. With built in air and dirt separation, low flow resistance, and a built in temperature sensor well, the NexBalance eliminates pump conflict and improves the heat transfer of your system.

Four easy connections means your time on the job is greatly reduced and the insulation jacket finishes your installation with a professional appearance while providing protection against heat loss.

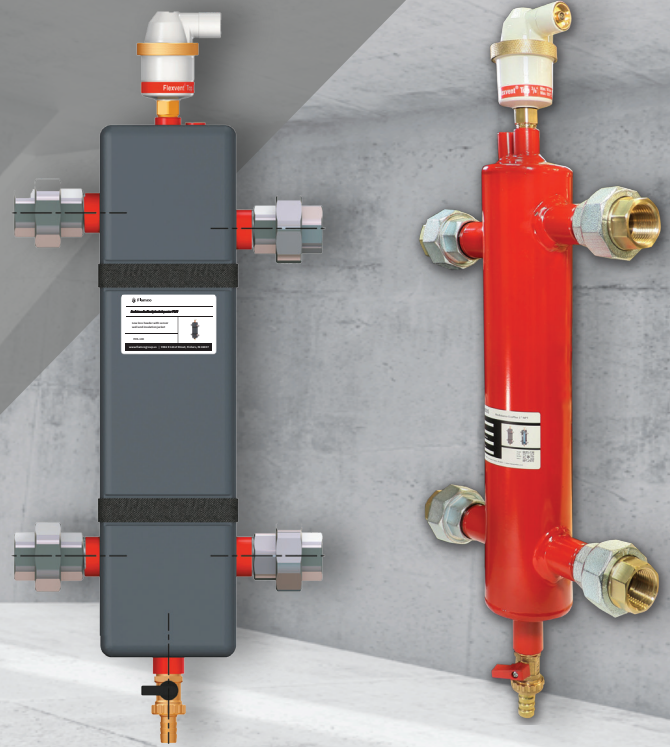

Features:

- Combination unit provides primary secondary piping as well as air and dirt separation
- Complete with Flexvent, blowdown valve, and insulation jacket
- Integrated temperature sensor well
- Max. temperature rating of 230°F
- Rated for up to 50% glycol

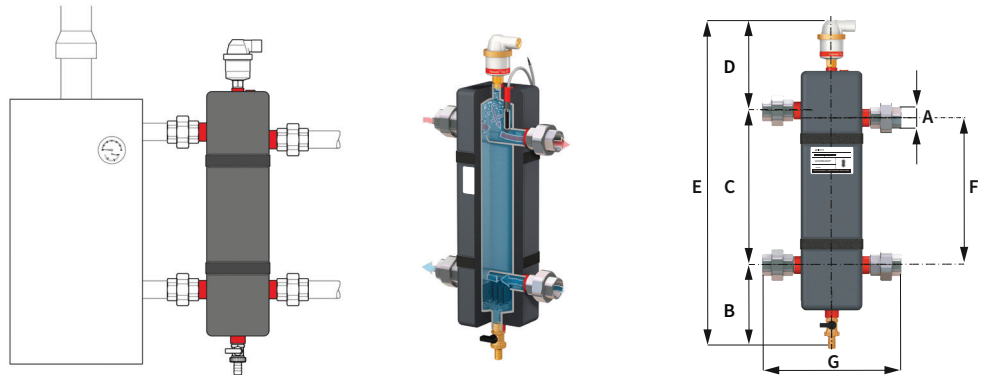

| Size | Dimensions (inches) | | | | | | | Part No. |
|------|---------------------|-----|------|-----|------|------|------|----------|
| | A | B | C | D | E | F | G | |
| 1" | 1 | 6.3 | 11.4 | 6.7 | 24.4 | 10.9 | 10.3 | FHS-100 |
| 1¼" | 1.25 | 6.3 | 13.3 | 7.1 | 26.8 | 12.6 | 11 | FHS-125 |
| 1½" | 1.5 | 6.3 | 13.3 | 7.1 | 26.8 | 12.6 | 12.6 | FHS-150 |
| 2" | 2 | 6.7 | 15.8 | 7.2 | 29.7 | 14.7 | 12.8 | FHS-200 |